

PROTEMPTM

OIL FIRED RADIANT HEATERS

PT-70-SS



Ultra Portable



Low Noise



PT-125-OFR




- **Powerful Instant Heat - High performance fan**
- **Safe & economical - Auto shut off if power is interrupted or flame is extinguished**
- **Quality Construction - Rugged steel body, heavy-duty motor & operating components**
- **Easy To Use - Fill with fuel, plug into approved power source & enjoy**
- **Value Added Features - Unmatched quality & performance design**



OIL FIRED RADIANT HEATERS



Typical Forced Air Heater

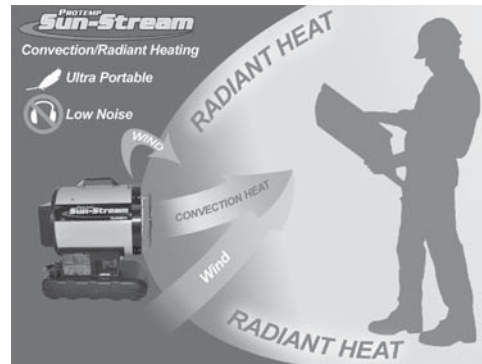

Convection / Radiant Heater

Portable Kerosene Forced Air Heaters - Product Specifications / Features

Model	PT-70-SS	PT-125-OFR
UPC# 6-57888...	090755	091264
Heat Output (BTU's)	70,000	125,000
Trade Brand	ProTemp Sun-Stream	ProTemp
Heat Type	Radiant + Fan Forced	Radiant + Fan Forced
Fuel Tank Capacity (Gal)	3.2	16
Fuel Tank Consumption (Gal / Hr)	0.53	0.95
Max Operating Hours	6	16.8
Heating Area (Sq Ft)	1750	3125
Overheat Shut-Off System	Yes	Yes
Safety Shut-Off System	Yes	Yes
Weight (Gross lbs / Net lbs)	34 / 28	98 / 84
Unit Dimensions (L" x W" x H")	20 x 13.4 x 21.3	26.6 x 27.8 x 38.3
Box Size (L" x W" x H")	21.5 x 14.6 x 21.9	26 x 27 x 34.3
Unit Approval	CSA Pending	CSA Pending
Container Quantity (40'N / 40'HQ)	518 / 604	106 / 106
Added Value Features		
Quiet Operation Pump System	X	X
Power Switch	X	X
Electronic Controls	X	X
Error Indicator Light	X	X
Fuel Gauge	X	X
Contractor Gauge Fuel Cap	X	X
Easy-Lift Handle	X	X
Fan Forced Air Flow	X	X
Radiant Heating System	X	X



*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see "User's Operations and Installation Manual" included with each heater for a complete list of important safety information. *These specifications are estimates only.*

SUGGESTED USES

Workshops
Garages
Farms
Construction Sites
Any Outdoor Heating Need

IMPORTANT NOTES

Not for use in residential living areas or inadequately ventilated areas
Proper ventilation required during operation

©2009
PINNACLE PRODUCTS INTERNATIONAL, INC
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996