

PROTEMPTM

PROPANE CABINET HEATER



PT-18PCH

Safe - Built-In Oxygen Sensor Turns Heater Off If Unsafe Oxygen Levels Occur, Auto Shut-Off Tip Over Device

Effective - Clean Quiet Instant Heat, No Electricity Required


Portable - Front & Rear Rolling Casters

Easy To Use - Integrated Knob Ignition

Heavy Duty Construction - Wind Resistant Burner System



PROPANE CABINET HEATER

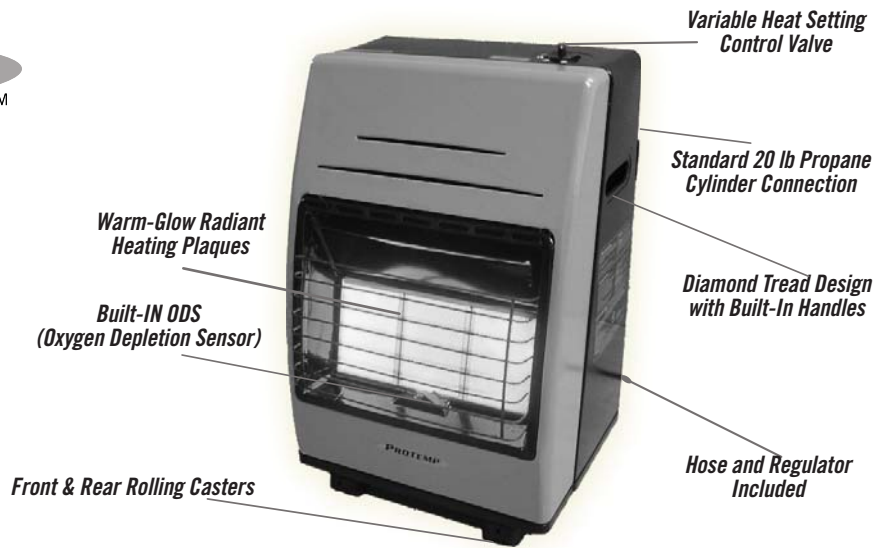

Propane Cabinet Heater - Product Specifications / Features

Model	PT-18PCH
Heat Output - Low (BTU)	6,600
Heat Output - Med (BTU)	12,000
Heat Output - High (BTU)	18,000
UPC# 6-57888...	08019-0
Heating Area - L / M / H (Sq. Ft.)	210 / 390 / 600
Fuel Consumption - L / M / H (lb./hr.)	.304 / .552 / .828
Required Cylinder Size	20 lb
Max Operating Hours - L / M / H (for 20 lb cylinder)	72 / 36 / 24
Fuel	Propane
Manifold Pressure	11.00" W.C.
Weight (Gross lbs / Net lbs.)	22 / 19.4
Unit Size (with cylinder retainer) (L x W x H)	15.1 x 17.8 x 24.2
Box Size (L x W x H)	15.1 x 13.6 x 23
Box Size (cubic ft.)	3.76
Container Quantity (40'N / 40' HQ)	678 / 778
Unit Approval	CSA
Added Value Features	
Heat Settings	3
Four Rolling Casters (2 Locking)	X
Piezo Ignition	X
Built-In ODS (Oxygen Deletion Sensor)	X
Safety Auto-Extinguish Tip Over Switch	X
Hose & Regulator Included	X
Radiant Heating System	X

*Specifications subject to change without notice. Use in accordance with any and all state or local codes, regulations, and/or ordinances. Please see heater "User's Operations and Installation Manual" included with each heater for a complete list of important safety information. *These specifications are estimates only.*

SUGGESTED USES

Workshops
Tailgating
Farms
Any Outdoor Heating Need

IMPORTANT NOTES

Not for use in residential living areas or inadequately vented areas
Proper ventilation required during operation

©2008
PINNACLE PRODUCTS INTERNATIONAL, INC
668 STONY HILL ROAD, #302
YARDLEY, PA 19067
www.pinnacleint.com
Phone: 1-800-641-6996